IDAHO 503

9 SHEETS.

1

CORRECTION RECORD			
REV'N NO.	DATE OF CORRECTION	ATTACHED BY	DATE ATTACHED
9	5-41		12-29-41

SANBORN MAP COMPANY
POPULATION 1920
PREVAILING WINDS N.&S
WATER FACILITIES SEE NOTE
1 STEAM & 1 HAND ENGINE
2 INDEPENDENT HOSE CARTS
1 HOOK & LADDER TRUCK
GRANGEVILLE
IDAHO CO.
IDAHO
SCALE OF 1 INCH TO 50 FEET
SEPTEMBER 1910
11 BROADWAY, NEW YORK
COPYRIGHTED 1910 BY THE SANBORN MAP COMPANY

GREAT CARE HAS BEEN EXERCISED IN THE PREPARATION OF OUR PUBLICATIONS BUT OUR SERVICE, BUT ABSOLUTE ACCURACY IS NOT GUARANTEED.

ALL RIGHTS RESERVED. NO PART OF THIS MAP MAY BE REPRODUCED IN ANY FORM WITHOUT WRITTEN PERMISSION FROM THE SANBORN MAP COMPANY.

INDEX

SPECIALS.

	SHEET
H	
Hotel Grangeville	7
" Revere	8
I	
Imperial Hotel	1
I. O. O. F. Hall	8
K	
Kerr-Gifford & Co. Grain Warehouse	9
Knorr, B. D., Flour Mill	8
" " Grain Warehouse	9
M	
M. E. Church	1
P	
Presbyterian Church	4
R	
Root, L. J., Flaning Mill	8
V	
Vollmer Clearwater Co., Ltd., Grain Wareho.	9
Y	
Y. M. C. A. Bldg.	8

NEW REPORT, May, 1941

GRADES:—Nearly level.

WATER FACILITIES

Owned by Washington Water Power Co. Gravity system. Source of supply from 2 concrete reservoirs, capacity 250,000 gallons and 150,000 gallons, located 1 mile south of Post Office and elevated 168' above business section; supplied by inexhaustible mountain springs. Water conveyed to town through a 6" steel main and a 10" steel main reduced to 6" and distributed through about 6 miles of 6", 4", and 2" steel distributing system. 43 double hydrants. Pressure 72 lbs. in business district.

FIRE DEPARTMENT

Organized, volunteer. 1 chief and 14 men, paid $1.00 per hour when on duty. Driver sleeps at Fire Station.

1 Studebaker auto hose and pump truck, capacity 500 gallons per minute, carrying 1,600' 2½" hose and 300' 1½" hose. 1 Ford V-8 auto hose and pump truck, capacity 400 gallons per minute, carrying 600' 2½" hose, 150' 1" hose and a 300 gallon booster tank. 600' 2½" hose in reserve. Equipment kept at Fire Station, Block 170, Sheet 1.

FIRE ALARM:—Electric siren on tower, located at City Hall, operated by push button and from telephone office.

FIRE LIMITS:—Shown by heavy red line on Key Map.

FIRE-RESISTIVE ROOFING ORDINANCE.
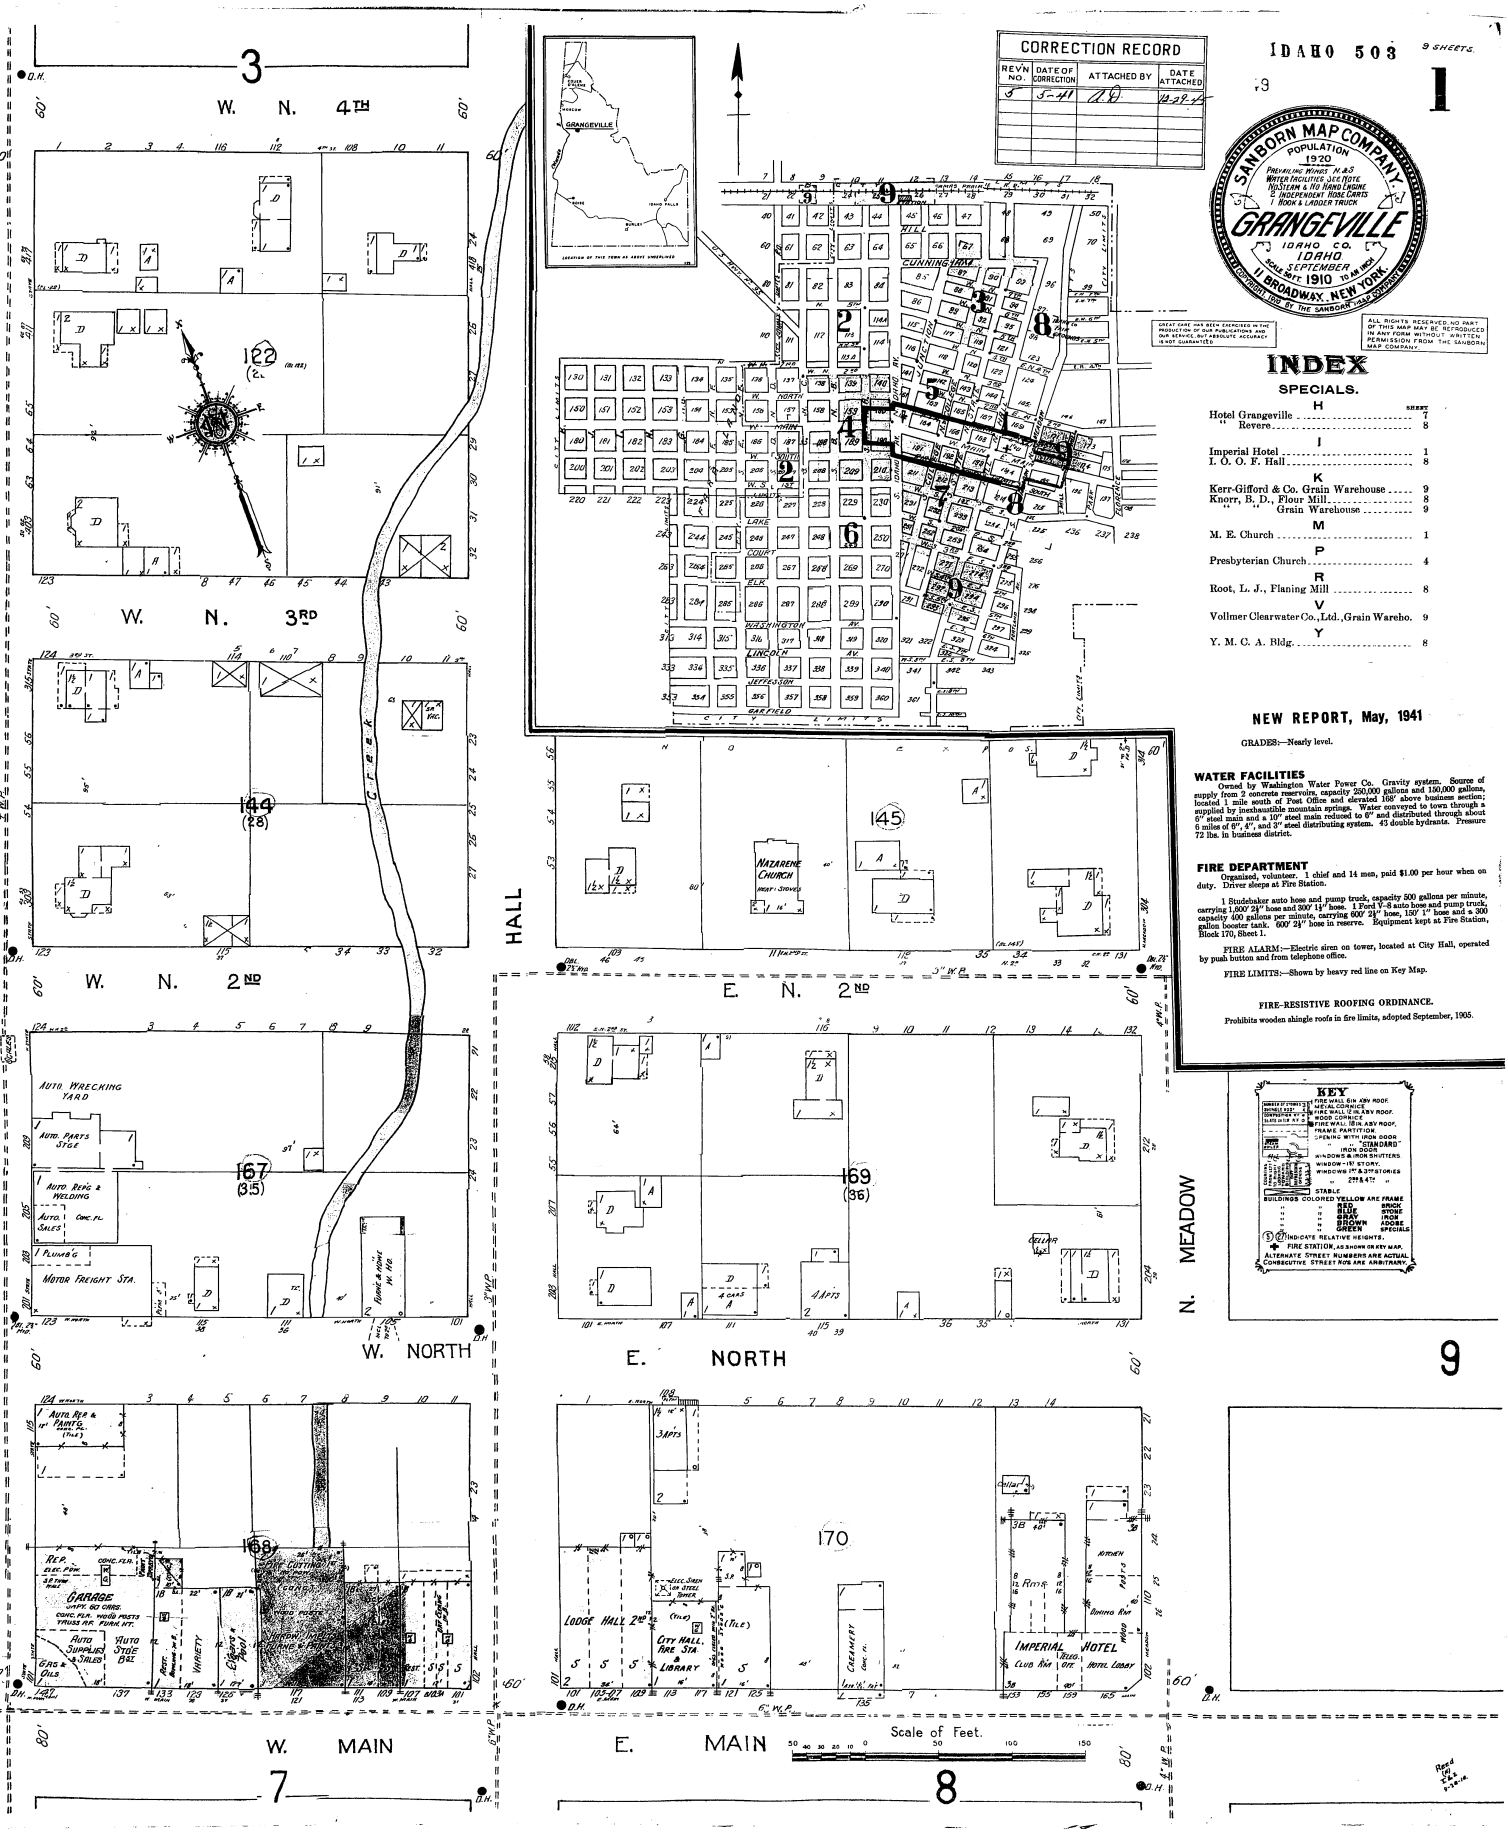
Prohibits wooden shingle roofs in fire limits, adopted September, 1905.